

## Data Sheet

**Customer :**

**Product :** Thin Film Array Chip Resistor - TFAN Series

**Size:** 0603x4

**Issued Date:** 17-Feb-22

**Edition :** REV.B8



VIKING TECH CORPORATION  
光頡科技股份有限公司

No.70, Guangfu N. Rad.,  
Hsin Chu Industrial Park,  
Hukou Hsiang, Hsin Chu Hsien,  
303, Taiwan

TEL:886-3-5972931

FAX:886-3-5972935•886-3-5973494

E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH  
光頡科技股份有限公司高雄分公司

No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,  
806, Taiwan

TEL:886-7-8217999

FAX:886-7-8228229

E-mail:sales@viking.com.tw

Viking Electronics (WUXI) CO., LTD.  
光頡電子(無錫)有限公司

No.1A,(Xixia Road),Machinery & Industry Park,  
National Hi-Tech Industrial Development Zone of  
Wuxi, Wuxi, Jiangsu Province, China

Zip Code:214028


TEL:86-510-85203339

FAX:86-510-85203667•86-510-85203977

E-mail:wuxisales@tmtec.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
17-Feb-22	17-Feb-22	17-Feb-22	17-Feb-22	
<i>Chun</i>	<i>Ben Chang</i>	<i>Ben Chang</i>		

**Thin Film Array Chip Resistor  
(TFAN Series)**

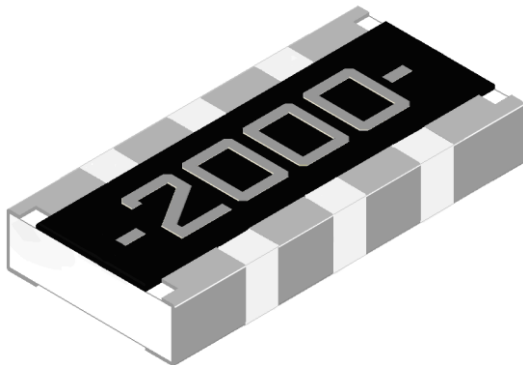


**■ Features**

- Advanced thin film technology
- Very tight tolerance down to  $\pm 0.05\%$
- Extremely low TCR down to  $\pm 5\text{PPM}/^\circ\text{C}$
- TCR tracking down to 5ppm( $\pm 2.5\text{ppm}$ ) and tolerance matching down to 0.1%( $\pm 0.05\%$ )
- RoHS compliant component, compatible with lead (Pb)-free

**■ Applications**


- Voltage divider
- Feedback circuits
- Signal conditioning

**■ Construction**

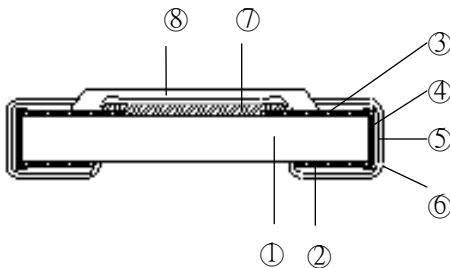


① Alumina Substrate	④ Edge Electrode	⑦ Resistor Layer
② Bottom Electrode	⑤ Barrier Layer	⑧ Overcoat
③ Top Electrode	⑥ External Electrode	

**■ Equivalent Circuit Diagram**

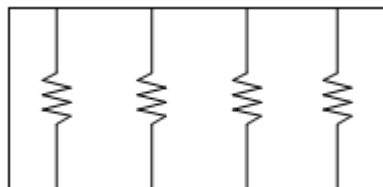

TFAN43

**■ Dimensions**

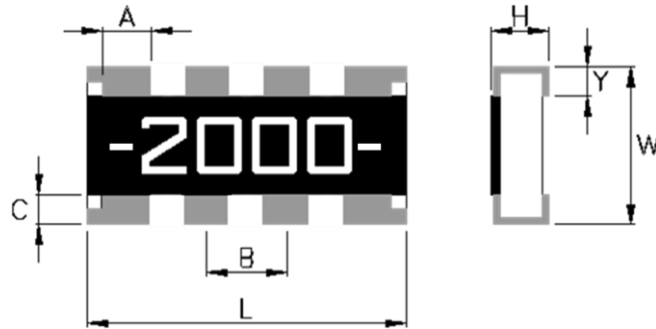


Type	Number of Resistors	L	W	H	A	B	C	Y
TFAN43	4	3.20±0.15	1.60±0.15	0.55±0.10	0.50±0.15	0.80±0.05	0.25±0.15	0.30±0.15

**■ Part Numbering**

TFAN	43	B0	T	C0	Y	1001	N
Product Type	Dimensions	Tolerance Grade	Packaging Code	TCR Grade	Power Rating	Resistance	Marking Code
	0603X4	Reference Tolerance Grade Table	T: Taping Reel B: Bulk	Reference TCR Grade Table	Y: 1/16W X: 1/10W	1000: 100Ω 1001: 1KΩ 1211: 1.21KΩ 3323: 332KΩ	: Standard Marking for E96 N: No Marking

Tolerance Grade				TCR Grade			
Code	Absolute Tolerance	Tolerance Matching	Resistance Value	Code	Absolute TCR	TCR Tracking	Resistance Value
A0	±0.05%	N/A	24.9~332K	S0	±5ppm	N/A	24.9~60K
B0	±0.1%	N/A	24.9~332K	S5	±5ppm	5ppm	24.9~60K
B3	±0.1%	0.1%	24.9~332K	B0	±10ppm	N/A	24.9 ~332K
C0	±0.25%	N/A	24.9~332K	B4	±10ppm	10ppm	24.9 ~332K
C2	±0.25%	0.25%	24.9~332K	B5	±10ppm	5ppm	24.9~60K
C3	±0.25%	0.1%	24.9~332K	N0	±15ppm	N/A	24.9 ~332K
D0	±0.5%	N/A	24.9~332K	N3	±15ppm	15ppm	24.9 ~332K
D1	±0.5%	0.5%	24.9~332K	N4	±15ppm	10ppm	24.9 ~332K
D2	±0.5%	0.25%	24.9~332K	N5	±15ppm	5ppm	24.9~60K
F0	±1%	N/A	24.9~332K	C0	±25ppm	N/A	24.9~332K
F1	±1%	0.5%	24.9~332K	C2	±25ppm	25ppm	24.9~332K
F2	±1%	0.25%	24.9~332K	C3	±25ppm	15ppm	24.9~332K
				C4	±25ppm	10ppm	24.9~332K
				D0	±50ppm	N/A	24.9~332K
				D1	±50ppm	50ppm	24.9~332K
				D2	±50ppm	25ppm	24.9~332K

**Derating Curve**

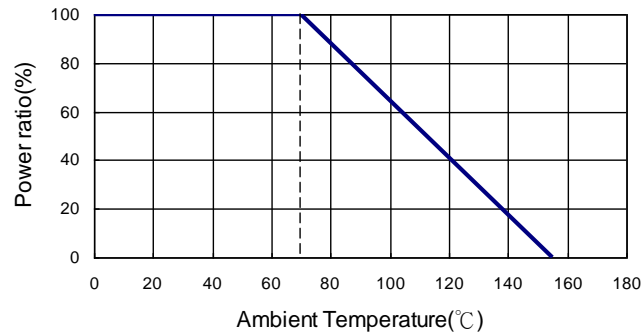

**Electrical Specifications**

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range					TCR (PPM/°C)
					±0.05%	±0.1%	±0.25%	±0.5%	±1%	
TFAN 43	1/16W	-55 ~ +155°C	50V	100V	24.9Ω-332KΩ					±10 ±15 ±25 ±50
	1/10W	-55 ~ +155°C	75V	150V						
	1/16W	-55 ~ +155°C	50V	100V	24.9Ω-60KΩ					±5
	1/10W	-55 ~ +155°C	75V	150V						

Operating Voltage= $\sqrt{P \cdot R}$  or Max. operating voltage listed above, whichever is lower.  
 Overload Voltage= $2.5 \cdot \sqrt{P \cdot R}$  or Max. overload voltage listed above, whichever is lower.  
 ■Viking is capable of manufacturing the optional spec based on customer's requirement.

**Environmental Characteristics**


Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	<b>MIL-STD-202 Method 304</b> +25/-55/+25/+125/+25°C
Short Time Overload	$\Delta R \pm 0.1\%$	<b>JIS-C-5201-1 4.13</b> RCWV*2.5 or Max. overload voltage whichever is lower for 5 seconds
Insulation Resistance	>1000 MΩ	<b>MIL-STD-202 Method 302</b> Apply 100V <sub>DC</sub> for 1 minute
Endurance	1000Hr : $\Delta R \pm 0.15\%$ 8000Hr : $\Delta R \pm 0.3\%$	<b>MIL-STD-202 Method 108</b> 70±2°C, RCWV with 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load	$\Delta R \pm 0.25\%$	<b>MIL-STD-202 Method 103</b> 40±2°C, 90-95% R.H., RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load(85°C/85% R.H)	$\Delta R \pm 0.5\%$	85±2°C, 80-90% R.H. 10% of RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Dry Heat	1000Hr : $\Delta R \pm 0.25\%$ 8000Hr : $\Delta R \pm 0.5\%$	At +125°C
Bending Strength	$\Delta R \pm 0.2\%$	<b>JIS-C-5201-1 4.33</b> Bending amplitude 3 mm for 10 seconds
Solderability	95% min. coverage	<b>MIL-STD-202 Method 208</b> 245±5°C for 3 seconds

Resistance to Soldering Heat	$\Delta R \pm 0.2\%$	<b>MIL-STD-202 Method 210</b> 260 $\pm$ 5°C for 10 seconds
Dielectric Withstand Voltage	100V	<b>MIL-STD-202 Method 301</b> Max. overload voltage for 1 minute
Thermal Shock	$\Delta R \pm 0.25\%$	<b>MIL-STD-202 Method 107</b> -55°C ~150°C, 100 cycles
Low Temperature Operation	$\Delta R \pm 0.25\%$	<b>JIS-C-5201-1 4.36</b> 1 hour, -65°C, followed by 45 minutes of RCWV

RCWV(Rated continuous working voltage)=  $\sqrt{P \cdot R}$  or Max. Operating voltage whichever is lower


- Storage Temperature: 15~28°C; Humidity < 80%RH
- Shelf Life: 2 years from production date.

**■ Soldering Condition(IPC/JEDEC J-STD-020)**

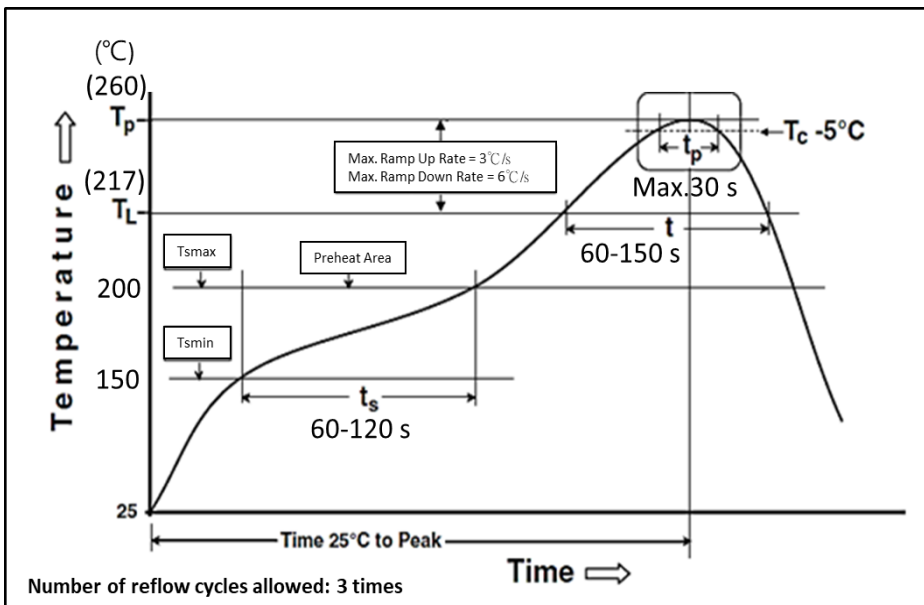

**■ Packaging**


Reel Specifications & Packaging Quantity

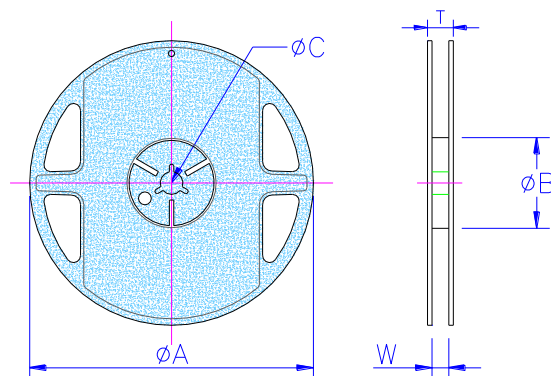

Unit: mm

Type	Packaging Quantity		Tape width	Reel Diameter	ΦA	ΦB	ΦC	W	T
TFAN 43	Paper	5K	8mm	7 inch	178.5±1.5	60 <sup>+1/-0</sup>	13.0±0.2	9.0±0.5	12.5±0.5

Paper Tape Specifications

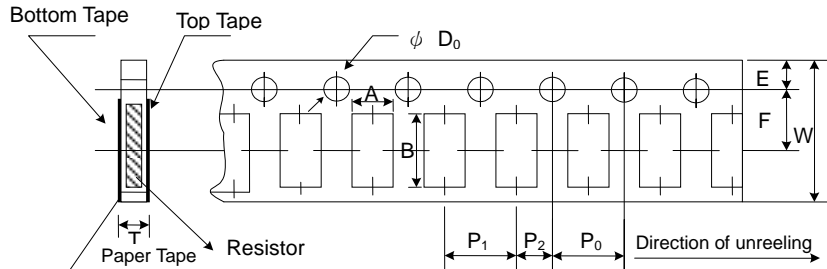

Unit: mm

Type	A	B	W	E	F	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	ΦD <sub>0</sub>	T
TFAN43	1.95±0.1	3.50±0.1	8.0±0.2	1.75±0.1	3.5±0.05	4.0±0.1	4.0±0.05	2.0±0.05	1.5 <sup>+0.1/-0</sup>	0.85±0.1


■ Marking

TFAN 43: 4 digits marking

Example:

Resistance	100Ω	2.2KΩ	10KΩ	49.9KΩ	100KΩ	332KΩ
marking	1000	2201	1002	4992	1003	3323

■ Recommend Land Pattern

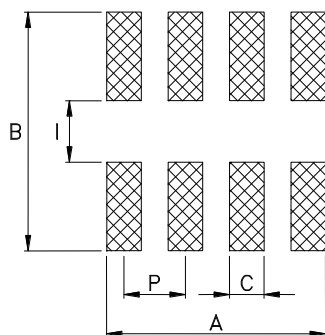

Unit: mm

Type	A	B	C	I	P
TFAN43	3.10	2.85	0.45	0.80	0.80