
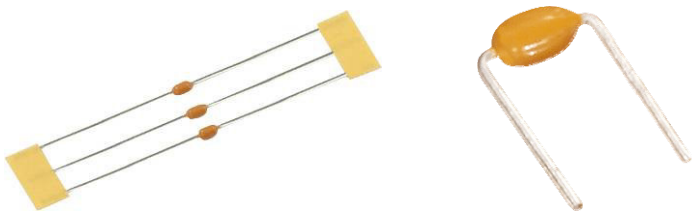
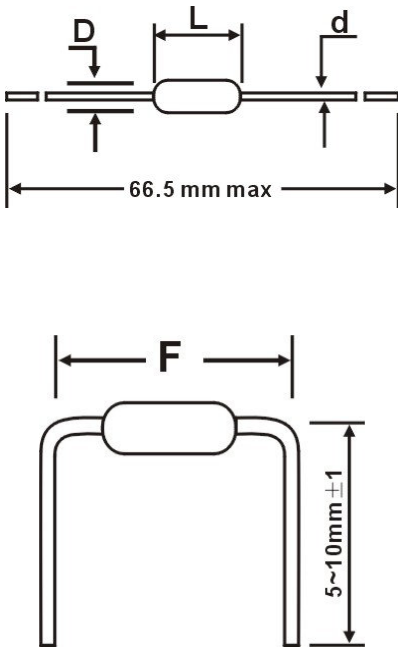
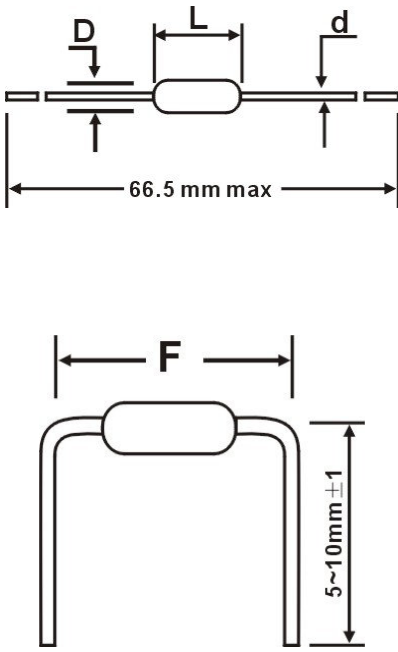
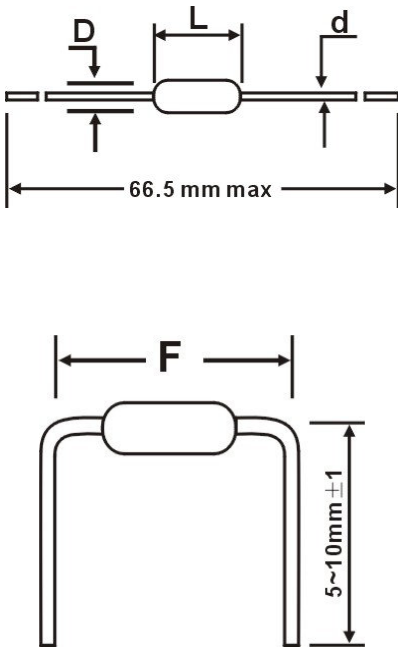
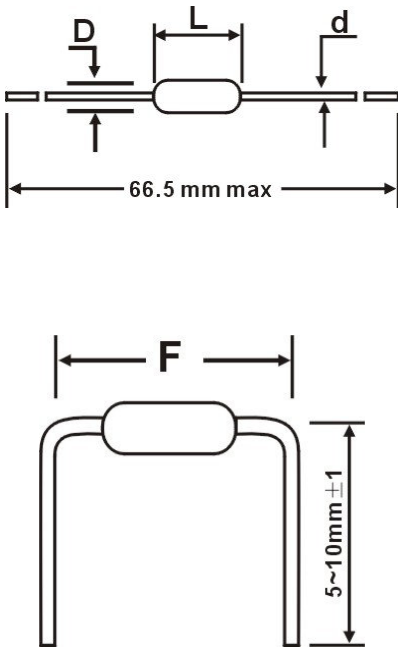
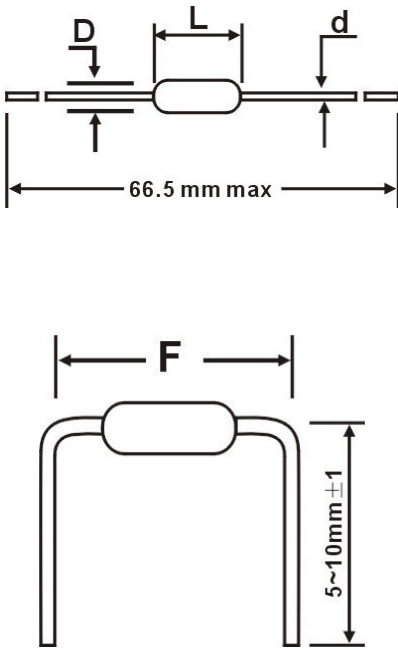


TS17

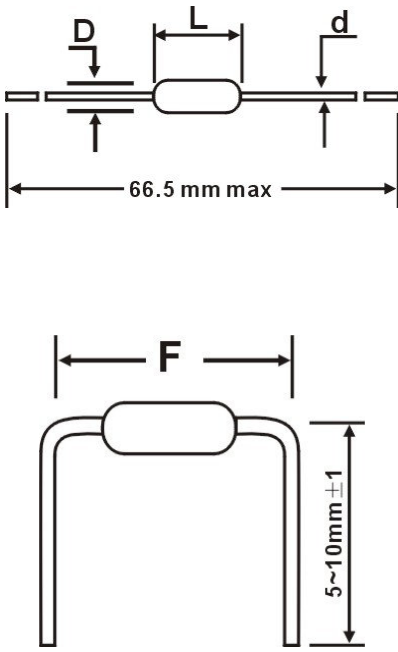

Axial Laser MLCC


◆ Size Code、Capacitance and Voltage

	Size code	Dimensions(mm)				voltage e	Capacitance ranges		
		L max	D max	F (±0.6)		d (±0.05)	COG (NPO)	X7R	Y5V (Z5U)
	15	3.8	2.5	5.08	10.0	0.45	25V OR5~102	101~333	222~224
							50V OR5~821	101~223	222~154
							100V OR5~561	101~472	
	16	5.08	2.5	5.08	10.0	0.45	25V OR5~332	331~104	103~105
							50V OR5~222	331~473	103~684
							100V OR5~102	331~223	
	17	4.30	2.5	5.08	10.0	0.45	25V OR5~332	331~104	103~105
							50V OR5~222	331~473	103~684
							100V OR5~102	331~223	
	19	7.50	3.0	7.50	10.0	0.45	25V OR5~472	102~224	103~125
							50V OR5~392	102~104	103~105
							100V OR5~152	102~683	
	20	5.10	3.0	7.50	10.0	0.45	25V OR5~472	102~224	103~125
							50V OR5~392	102~104	103~105
							100V OR5~152	102~683	

◆ Packaging style

Tape and reel


Tape style	A	B
Tape width:26mm	26±1.5mm	13±0.76mm
Tape width:52.4mm	52.4±1.5mm	26.2±0.76mm

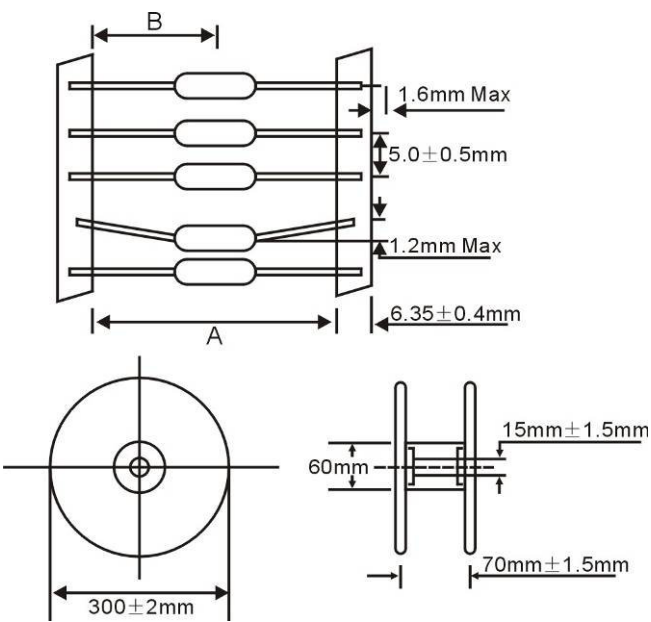

TS17

Ammo package

Tape style	A	B	C	D
52.4mm	81(±5)mm	72(±5)mm	258(±5)mm	Lable
26mm	50(±5)mm	110(±5)mm	258(±5)mm	

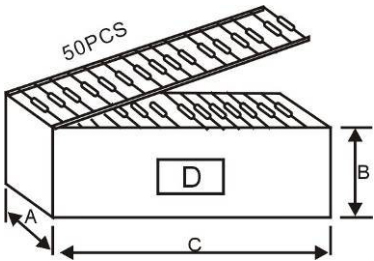

Packaging quantity

Size code	Tape and reel	Ammo package	Bulk package
15	5000	5000	1000(500)
16	5000	5000	1000(500)
17	5000	5000	1000(500)
19	2500(5000)	2500(5000)	500
20	2500(5000)	2500	500

*packaging according to the customer’s requirement